

DIGITAL

Linija bojlera za kupatila sa elektronskim upravljanjem, MB modeli (50/80/100/120) - prečnika bojlera 454mm, sa emajliranim ili inox kazanom



**BAKARNI
GREJAČ**




**INOX
GREJAČ**



- Elektronsko upravljanje
- Precizno kontrolisanje temperature
- Odloženi start
- Antifrost i antibakterijskazaštita
- Zaštita od pregrevanja
- Elektronska regulacij postavljena u režim ECO rada na temperaturu 60° C, koji možete povećavati i smanjivati preko elektronskog termostata
- Poliuretanska ECO izolacija
- Inox izlivna cev
- Univerzalni nosač
- Mg anoda
- Sigurnosni ventil 8 bara



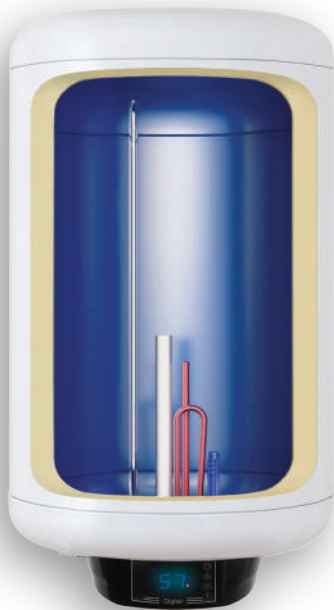

5 godina
garancije

DIGITAL

Zapremina (lit)	50	80	100	120
Ident	376145	376146	376147	376148
Model	MB P50 R	MB P80 R	MB P100 R	MB P120 R
Kazan	emajl	emajl	emajl	emajl
Prečnik (mm)	454	454	454	454
Visina (mm)	605	825	965	1105
Dubina (mm)	480	480	480	480
Snaga grejača (kW)	2	2	2	2
Pritisak (bar)	6	6	6	6
Sigurnosni ventil (bar)	8	8	8	8
Vreme zagrevanja vode do 75 C (min)	110	175	220	265
Količina mešane vode na 40 C (lit)	90	145	180	210
Priključak za vodu (")	G 1/2	G 1/2	G 1/2	G 1/2
Dužina Mg anode Ø22 (mm)	250	300	350	350
Energetski razred	C	C	C	C
Garancija na el.komponente (meseci)	25	25	25	25



10 godina
garancije

DIGITAL *Inox*

Zapremina (lit)	50	80	100	120
Ident	376149	376150	376151	376152
Model	MB 50 E2i	MB 80 E2i	MB 100 E2i	MB 120 E2i
Kazan	inox	inox	inox	inox
Prečnik (mm)	454	454	454	454
Visina (mm)	605	825	965	1105
Dubina (mm)	480	480	480	480
Snaga grejača (kW)	2	2	2	2
Pritisak (bar)	6	6	6	6
Sigurnosni ventil (bar)	8	8	8	8
Vreme zagrevanja vode do 75 C (min)	110	175	220	265
Količina mešane vode na 40 C (lit)	90	145	180	210
Priključak za vodu (")	G 1/2	G 1/2	G 1/2	G 1/2
Dužina Mg anode Ø22 (mm)	200	250	300	300
Energetski razred	C	C	C	C
Garancija na el.komponente (meseci)	25	25	25	25